



Innovation
With a Human Touch

4F-1, 236, Fu-Te 2nd Rd., His Chih,

Taipei Hsien, 221, Taiwan

TEL:886-2-6616-6692 · 2694-6687

FAX:886-2-2694-6875 · 2694-5097

X252_X380 & Hybrid power board changing process

Version: 1.0
May 20, 2014


Revision History :

Version	Date	Page	CONTENTS
1.0	May, 20 2014		First release

1. Dismount six screws on the side panel (see red arrows below)



2. Disconnect the AC cable (see picture below)

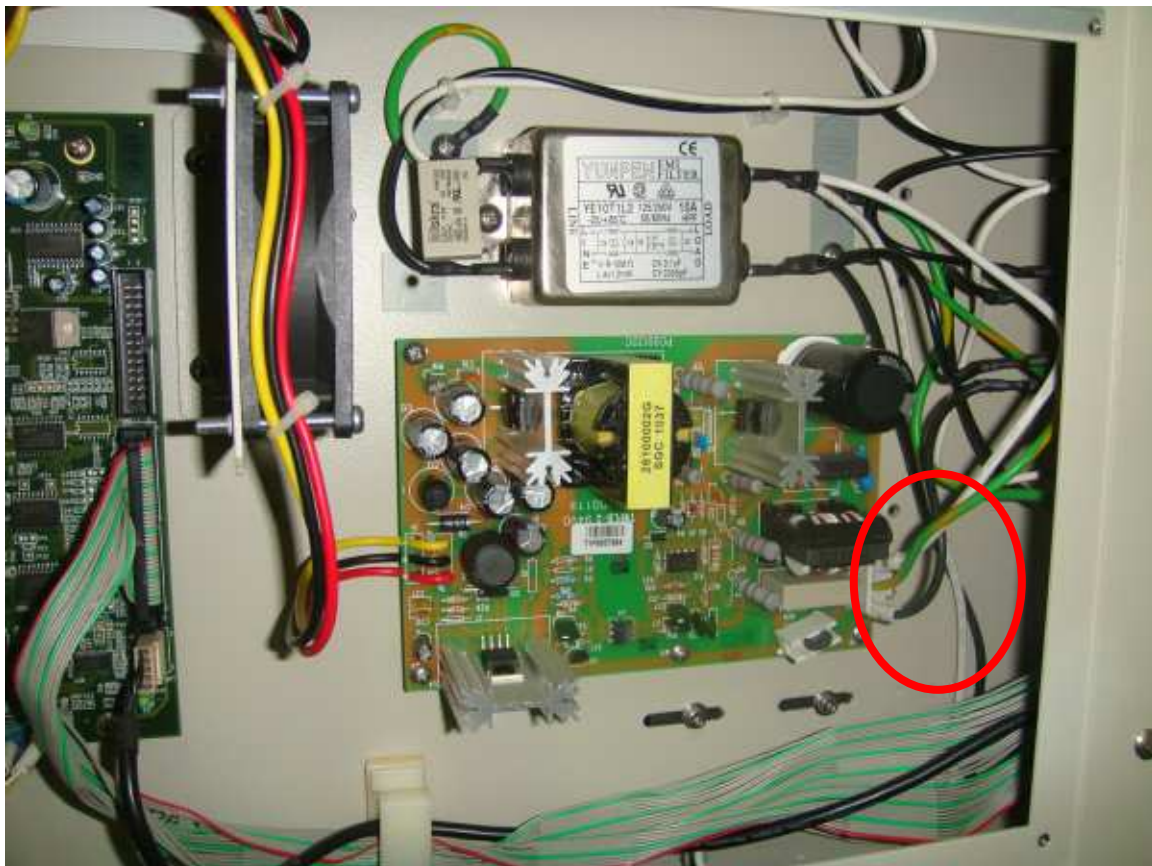

3. Disconnect the DC cable (see picture below)



4. Loosen five screws to remove the power board (see picture below)

